


Product Data Sheet	G12FF Type 2 Valve Manifold
---------------------------	------------------------------------

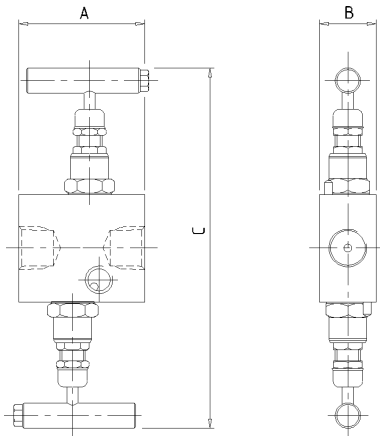

The 'G12FF' Type 2 valve manifold is designed for remote mounting to static pressure transmitters. The separate vent valve gives full control of venting of the instrument, plus the ability to calibrate in-situ. Each needle valve head is designed for safe and reliable isolation, giving bubble tight shut off, with non-rotating & anti-galling tip and dynamic self-adjusting spindle seal to give long service life in a variety of service conditions.

Part No.	Connections Size	A	B	C	Weight (Kgs)
G12FF	1/2" F x F	2.5	1.1	7.1	0.9

Key Features of the Oliver Needle Valve range

- Non rotating tip - self centering & anti-galling
- Piston ring - gives dynamic adjustment of gland seal in response to pressure change
- Anti-blow out spindle - a major safety feature
- Secure seal - precision machined to give leak free operation for the life of the valve. Available in either PTFE or Grafoil

Standard Specification

Pressure: 6000psi	Packing: PTFE	Handle: T-Bar	Bore: 0.21" (5.4mm)
Temp: 240 deg C	Thread form: NPT	Seat: Metal to metal	CV: 0.46
1/2" Inlet / Outlet Connections		1/4" NPT Vent Connection	

Ordering Code

	(Typical example) →	G12FF	S	/	BT	/	AT
Type							
G12FF - Female x Female							
Material							
S - 316S31 Stainless Steel M - Monel (400) HC - Hastalloy (C276) (Others available)							
Optional Connections (NPT Standard)							
BT - BSP Taper BP - BSP Parallel (top sealing) BTV - BSP Taper Vent BPV - BSP Parallel Vent							
Options							

AG - Grafoil
 AT - Anti-Tamper
 BKTC - Carbon steel mounting bracket
 BKTS - Stainless steel mounting bracket
 HL - Handle Locking
 HL-PI - Handle Locking + Position Indicator
 HW - Hand Wheel
 LT100 - Cryogenic Head Unit (-100°C)

MT - Metering Tip
 MTG - Tapped Mounting Holes x 2
 NA - NACE MR-01-75 (latest revision)
 OXY - Oxygen Cleaned
 PK - PEEK Soft Tip
 PP - Blank Plug In Vent Connection
 2H - Straight through mounting holes x 2

Rev 1.1