

# PRESSURE REDUCING VALVES


## 361 MINIPRESS pressure reducin valve with pressure gauge connection

#### **MINIPRESS**



MEASURE	PRESSURE	CODE	PACKING
1/2" (DN 15)	15bar/217.5psi	3610012	4/56
3/4" (DN 20)	15bar/217.5psi	3610034	4/56

#### **CERTIFICATIONS**

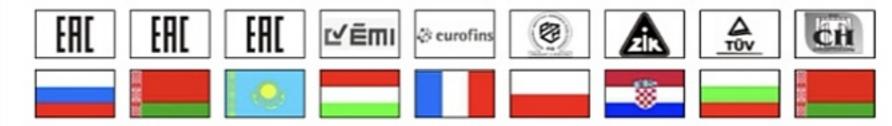

### **TECHNICAL SPECIFICATIONS**

Compensated piston operation.

Female/female threads.

Body in nickel-plated brass.

Minimum and maximum working temperatures: 0°C, 80°C.

Maximum inlet pressure: 15 bar.

Outlet pressure can be adjusted between 1 and 4 bar.

Factory preadjustment 3 bar.

Outlet pressure gauge connection 1/4".

Threads: ISO 228 (equivalent to DIN EN ISO 228 and BS EN ISO 228).

